


**PCT**WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>H02K</b>	<b>A2</b>	(11) International Publication Number: <b>WO 98/34320</b> (43) International Publication Date: 6 August 1998 (06.08.98)
(21) International Application Number: <b>PCT/GB98/00307</b> (22) International Filing Date: 30 January 1998 (30.01.98) (30) Priority Data: 9701983.0 31 January 1997 (31.01.97) <b>GB</b> (71) Applicant (for all designated States except US): NEW TRANS- DUCERS LIMITED [GB/GB]; Stonehill, Huntingdon, Cam- bridgeshire PE18 6ED (GB). (72) Inventors; and (75) Inventors/Applicants (for US only): AZIMA, Henry [CA/GB]; 3 Southacre Close, Chaucer Road, Cambridge CB2 2TT (GB). ROBERTS, Martin [GB/GB]; 17 Home Farm Lane, Bury St. Edmunds, Suffolk IP3 2QJ (GB). JARVIS, Edward [GB/GB]; 5 The Fairway, Wood End, Bluntisham, Cambridgeshire PE17 3LF (GB). (74) Agent: MAGUIRE BOSS; 5 Crown Street, St. Ives, Cam- bridgeshire PE17 4EB (GB).	(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, GW, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).  Published <i>Without international search report and to be republished upon receipt of that report.</i>	

(54) Title: ELECTRO-DYNAMIC EXCITER

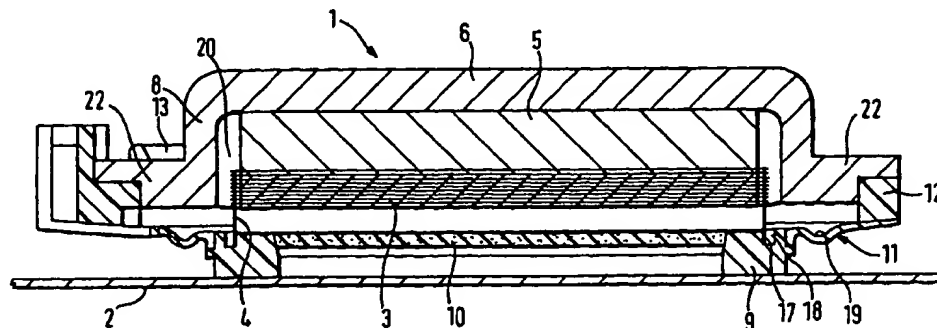

## (57) Abstract

An electro-dynamic inertial vibration exciter (1) for exciting a member (2) having capability to sustain and propagate input vibrational energy comprising a motor coil assembly (3, 4) having a coil (3) rigidly fixed to a tubular coil former member (4), a magnet assembly (5, 6, 7) disposed concentrically with respect to the motor coil assembly, and means (11) suspending the magnet assembly for axial movement relative to the motor coil assembly, characterised by a carrier (9) supporting the motor coil assembly (3, 4) and adapted for connection to the member (2) to be excited.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

5                    TITLE:     ELECTRO-DYNAMIC EXCITER

10                   DESCRIPTION

15                   TECHNICAL FIELD

                  The invention relates to an electro-dynamic exciter  
e.g. for use in activating a resonant panel-form radiator  
loudspeaker of the kind described in co-pending  
International patent application published under WO97/09842  
20 dated 2 September 1996.

BACKGROUND ART

                  More particularly, the present invention is an  
electro-dynamic inertial vibration exciter, e.g. of the  
general kind described in International patent application  
25 published under WO97/09859 dated 2 September 1996 which  
describes an inertial vibration exciter comprising a motor  
coil assembly having a coil rigidly fixed to a tubular coil  
former, a magnet assembly disposed concentrically with

respect to the motor coil assembly and forming an inertial mass, and resilient means supporting the magnet assembly for axial movement relative to the motor coil assembly, and wherein the tubular member is adapted to be rigidly mounted  
5 directly to a member to be vibrated, e.g. a resonant panel loudspeaker, by adhesive means.

The present invention relates to the efficient construction of exciters and to manufacturing techniques for producing such exciters.

10 DISCLOSURE OF INVENTION

According to the invention an electro-dynamic inertial vibration exciter for exciting a member having capability to sustain and propagate input vibrational energy and comprising a motor coil assembly having a coil rigidly  
15 fixed to a coil former member, a magnet assembly disposed concentrically with respect to the motor coil assembly, and means suspending the magnet assembly for axial movement relative to the motor coil assembly, is characterised by a carrier supporting the motor coil assembly and adapted for  
20 connection to the member to be excited. The carrier may be directly connected to the coil former member. The suspension means may be connected to the carrier. A coupling member may be connected to the carrier via the suspension member, which coupling member is adapted to  
25 carry the magnet assembly.

The coupling member and the magnet assembly may be adapted to interfit one with the other, and means may be provided on the coupling member and on the magnet assembly

for fixing the coupling member and magnet assembly together. The fixing means may comprise latch means. The carrier and the suspension member may be integral. The coupling member and the suspension member may be integral.

5 The suspension may be resilient. The suspension may be formed as a diaphragm. Alternatively the suspension may comprise a set of resilient arms. The coupling member and the carrier may be annular and the arms may be connected between the coupling member and the carrier to extend

10 circumferentially.

The carrier may have a face adapted for contact with the resonant member and arranged to be fixed thereon, e.g. by adhesive means or by fastening devices. The carrier may be formed integrally with a flange arranged to be fixed to

15 the resonant member. The flange may be disc-like and arranged to support the exciter in a cavity in the resonant member by an edge portion of the flange. The disc may be arranged to close the cavity.

An end of the coil former member may be located and

20 mounted in a recess in the carrier. The coil may be mounted on the outer face of the coil former member.

The magnet assembly may comprise opposed generally disc-like pole pieces sandwiching a magnet, the periphery of one of which pole pieces being disposed within and

25 adjacent to the motor coil assembly, and the periphery of the other of which pole pieces being formed with an upstanding flange arranged to lie adjacent to and to surround the motor coil assembly. The flange may be

adapted to interfit with the coupling member. A lip may be formed on the flange, which lip is shaped to interfit with the coupling member, and fixing means on the coupling member may be adapted to engage the lip. A dust seal may  
5 be arranged to close the annular coil carrier.

The means suspending the magnet assembly for axial movement relative to the motor coil assembly may comprise a pair of axially spaced suspension parts or components to facilitate the axial guidance of the voice coil with  
10 respect to the motor coil assembly. The suspension parts may be of any desired form, e.g. they may comprise respective sets of resilient arms. The respective outer ends of the resilient arms in each suspension part may be coupled together by posts, the lower ends of which form  
15 feet adapted for contact with the resonant member. The inner ends of the arms may carry respective annular coupling members adapted to carry the magnet assembly.

From another aspect the invention is a loudspeaker comprising an inertial vibration exciter as described  
20 above.

#### BRIEF DESCRIPTION OF DRAWINGS

The invention is diagrammatically illustrated, by way of example, in the accompanying drawings, in which:-

Figure 1 is a cross-sectional side view of a first  
25 embodiment of inertial electro-dynamic vibration exciter in accordance with the present invention;

Figure 2 is an exploded cross-sectional side view of the embodiment of Figure 1;

Figure 3 is an enlarged cross-sectional side view of a detail of the embodiment of Figure 1;

Figure 4 is a plan view of a suspension component in the embodiment of Figure 1;

5        Figure 5 is a plan view similar to that of Figure 4 of a modified form of suspension component for use in the embodiment of Figure 1;

Figure 6 is a plan view similar to that of Figure 4 of a further modified form of suspension component for use in  
10 an exciter of the kind shown in Figure 1;

Figure 7 illustrates an embodiment of inertial electro-dynamic vibration exciter adapted to be embedded within a resonant member to be excited;

Figure 8 is a plan view of a suspension component  
15 generally similar to that of Figure 4 for the exciter of Figure 7;

Figure 9 is a perspective view of a modified form of suspension component for an exciter of the kind shown generally in Figure 1;

20        Figure 10 is a cross-section side view of the suspension component of Figure 9, taken on the line Y-Y of Figure 11, and

Figure 11 is a cross-sectional plan view taken on the line X-X of Figure 10.

25        BEST MODES FOR CARRYING OUT THE INVENTION

Figures 1 to 4 disclose a first embodiment of electro-dynamic inertial vibration exciter (1) of the general kind described in International patent application WO97/09859

for example for exciting bending wave vibration in a resonant member (2) e.g. a panel-form member of the general kind described in International patent application WO97/09842, to form a loudspeaker.

5        Thus the exciter (1) comprises a motor coil assembly (3,4) and a magnet assembly (5,6,7) forming an inertial mass adapted to move relative to the motor coil assembly (3,4), the exciter being adapted to be fixed in any convenient fashion to the resonant member (2) to be excited  
10 to impart bending wave energy to the resonant member (2) when an electrical signal is applied thereto.

      The motor coil assembly (3,4) comprises a voice coil (3), e.g. of wire, wound on a tubular coil former (4) which is supported at its lower end (17), as seen in Figure 1, in  
15 an annular groove (18) in an annular coil carrier (9) which forms a foot by which the motor coil assembly is secured e.g. by means of an adhesive or the like, to a face of the resonant panel (2). Alternatively the coil carrier could be secured to the resonant member (2) by fixing means, e.g.  
20 fasteners. Such fasteners may be releasable. Thus a bayonet connector may be provided, one part of which is fixed to the resonant member and the other part of which is formed integrally with the exciter. The coil former (4) may be secured in the groove (18) by means of an adhesive.

25        The motor coil assembly (3,4) is surrounded by an annular coupling member (12) which is connected to the motor coil assembly carrier (9) by a resilient annular suspension diaphragm (11) e.g. of rubber-like material



which is formed with a concentric annular corrugation (19) to facilitate axial movement of the coupling member relative to the carrier. The carrier (9) and the coupling member (12) may be of hard plastics and may be co-moulded  
5 together with the resilient diaphragm (11) to form an integrated suspension component or assembly. The interior of the annular carrier (9) is closed by a disc (10) e.g. of foamed plastics, to form a dust seal closing the interior of the exciter.

10 The magnet assembly (5,6,7) comprises a disc-like magnet (5) sandwiched between opposed pole pieces (6,7), the one (7) of which is disc-like and is co-extensive with the magnet (5), and the other (6) of which is cup-like and is formed with a downturned flange (8) surrounding the  
15 magnet (5) and pole piece (7) to form an annular gap (20) for receiving the voice coil (3). The free end of the flange (8) is formed as an outwardly extending lip (22) which is formed with an annular recess (21) at its outer end to define a socket into which the coupling member (12)  
20 can be snugly received in the manner of a spigot and socket joint firmly to hold the magnet assembly and the motor coil assembly together. Snap-action clips (13) on the coupling member (12) engage the lip (22) to prevent disengagement.

The coupling member (12) is formed with a pair of  
25 terminal flanges (14) carrying electrical terminals (15) (see Figure 3) which are electrically connected to the voice coil (3) via coil wires or tails (16), whereby the coil can be connected to a signal source and energised

thereby.

Figure 5 illustrates a modified form of suspension component or assembly for an exciter as described in Figures 1 to 4 in which the resilient diaphragm (11) of Figure 4 is replaced by a relatively stiff diaphragm (23) of textiles fabric impregnated with a plastics material, e.g. epoxy resin. The diaphragm (23) is formed integrally with the coupling member (12) and the coil carrier (9), e.g. by injection moulding the members (9) and (12) into the diaphragm.

Figure 6 illustrates an alternative form of suspension component or assembly for an exciter as described in Figures 1 to 4 in which the coil carrier (9), the coupling member (12) and a resilient suspension (28) between the two are formed integrally by an annular member (24) of springy plastics material by moulding the annular member with circumferential slots (25) extending part-way round the annular member to divide the member into an outer part (26), which forms the coupling member (12), an inner part (27) which forms the coil support (9), the inner and outer parts being separated and connected by a resilient suspension formed by an array of three arms (28) defined by the slots (25), which arms extend circumferentially of the member (24) and the outer ends (29) of which are coupled to the outer part (26) and the inner ends (30) of which arms are coupled to the inner part (27). Thus the suspension operates by flexure of the resilient arms.

Figures 7 and 8 disclose an arrangement in which an

exciter (1) as described above is embedded in a cavity (31) in a resonant panel-form member (2). In this case the carrier (9) is formed integrally with an outwardly extending disc-like flange (32) by which the exciter is  
5 mounted in a cavity surrounding recess (33) in a face (34) of the member (2) and whereby the cavity is closed.

In Figures 9 to 11 there is disclosed an exciter of the general kind described in Figures 1 to 3, employing a modified form of the suspension component or assembly of  
10 Figure 6. In this case however, the suspension component consists of two axially spaced sets of the resilient arms (28), further to enhance the guidance of the magnet assembly (5,6,7) relatively to the motor coil assembly (34). It should be noted that Figure 9 shows the magnet  
15 assembly exploded away from the suspension component, although only the pole piece (6) is visible. Also the suspension component is shown partly broken away at its right hand side, in the interests of clarity.

The suspension component or assembly comprises a  
20 single plastics moulding forming the carrier (9) the coupling member (12) and the respective sets of resilient arms (28). The coupling member (12) comprises upper and lower parts as described more fully below.

At its base, the suspension component comprises an  
25 annular carrier (9) formed with an annular groove (18) for receiving and locating the end (17) of a coil former (4). An array of connecting bars (35) extend outwardly from the carrier and their outer ends connect to feet (36) which are

adapted to rest against the resilient member (2) (not shown). The feet (36) support the outer ends (29) of a lower set of the resilient arms (28).

The inner ends (30) of the lower set of resilient arms  
5 carry a lower annular coupling member (12) having an upstanding flange (37) adapted snugly to receive and support the lower end of the flange (8) of the pole piece (6) of a magnet assembly of the general kind shown in Figures 1 and 2.

10 The feet (36) support upwardly extending posts (38) which support an upper suspension member consisting of an upper set of resilient arms (28) carrying an upper annular coupling member (12) adapted snugly to embrace the flange (8) of the pole piece (6). The upper suspension member is  
15 arranged such that the upper ends of the support posts carry the outer ends of the set of arms (28), the inner ends of the arms carrying the upper annular coupling member. The upper annular coupling member may comprise fasteners (not shown) which engage the pole piece (6) with  
20 snap action to prevent accidental disengagement. Alternatively the pole piece and the suspension may be fixed together by adhesive means.

#### INDUSTRIAL APPLICABILITY

The invention thus provides convenient ways of  
25 manufacturing inertial vibration exciters, including integrated suspension assemblies formed as plastics mouldings or co-mouldings.

CLAIMS

1. An electro-dynamic inertial vibration exciter (1) for exciting a member (2) having capability to sustain and propagate input vibrational energy comprising a motor coil  
5 assembly (3,4) having a coil (3) rigidly fixed to a tubular coil former member (4), a magnet assembly (5,6,7) disposed concentrically with respect to the motor coil assembly, and means (11) suspending the magnet assembly for axial movement relative to the motor coil assembly, characterised  
10 by a carrier (9) supporting the motor coil assembly (3,4) and adapted for connection to the member (2) to be excited.
2. An inertial vibration exciter according to claim 1, characterised in that the carrier (9) is directly connected to the coil former member (4).
- 15 3. An inertial vibration exciter according to claim 1 or claim 2, characterised in that the suspension means (11,23,24) is connected to the carrier.
4. An inertial vibration exciter according to claim 3, characterised by a coupling member (12) which is connected  
20 to the carrier via the suspension member (11,23,24) which coupling member is adapted for fixing to the magnet assembly.
5. An inertial vibration exciter according to claim 4, characterised in that the coupling member (12) and the  
25 magnet assembly (5,6,7) are adapted to interfit, and characterised by means (13) on the coupling member and on the magnet assembly for fixing the coupling member and magnet assembly together.

6. An inertial vibration exciter according to claim 5, wherein the fixing means comprises latch means (13).
7. An inertial vibration exciter according to any one of claims 4 to 6, wherein the carrier (9) and the suspension member (11,23,24) are integral.
8. An inertial vibration exciter according to any one of claims 4 to 7, characterised in that the coupling member (12) and the suspension member (11,23,24) are integral.
9. An inertial vibration exciter according to any preceding claim, characterised in that the suspension (11,23,24) is resilient.
10. An inertial vibration exciter according to claim 9, characterised in that the suspension (11,23) is formed as a diaphragm.
11. An inertial vibration exciter according to any one of claims 1 to 9, characterised in that the suspension (24) comprises a set of resilient arms (28).
12. An inertial vibration exciter according to claim 11, when dependent on claim 4, characterised in that the coupling member (12) and the carrier (9) are annular and in that the arms (28) are connected between the coupling member (12) and the carrier (9) to extend circumferentially.
13. An inertial vibration exciter according to any one of claims 4 to 12, characterised in that the carrier (9) has a face adapted for contact with the member (2).
14. An inertial vibration exciter according to any preceding claim, characterised in that an axial end (17) of

the coil former member (4) is located and mounted in a recess (18) in the carrier (9).

15. An inertial vibration exciter according to any preceding claim, characterised in that the coil (3) is  
5 mounted on the outer face of the coil former member (4).

16. An inertial vibration exciter according to any preceding claim, characterised in that the magnet assembly (5,6,7) comprises opposed generally disc-like pole pieces (6,7) sandwiching a magnet (5), the periphery of one (7) of  
10 which pole pieces is disposed within and adjacent to the motor coil assembly (3,4), and the periphery of the other (6) of which pole pieces is formed with a downturned flange (8) arranged to lie adjacent to and to surround the motor coil assembly (3,4) to form a coil receiving gap (20).

15 17. An inertial vibration exciter according to claim 16, where dependent on claim 4, characterised in that the flange (8) is adapted to interfit with the coupling member (12).

18. An inertial vibration exciter according to claim 17,  
20 when dependent on claim 5, characterised by a lip (22) on the flange (8), which lip is shaped to interfit with the coupling member (12), and by fixing means (13) on the coupling member and is adapted to engage the lip (22).

19. An inertial vibration exciter according to any  
25 preceding claim when dependent on claim 12, characterised by a dust seal (10) closing the annular carrier (9).

20. An inertial vibration exciter according to any preceding claim, characterised in that the suspension (24)


comprises an axially spaced pair of suspension components (28) which are formed integrally one with the other.


21. An inertial vibration exciter according to claim 20, characterised in that the axially spaced pair of suspension  
5 components (28) are moulded integrally with the coil carrier (9) and with a coupling member (12) for engaging and supporting the magnet assembly.


22. An inertial vibration exciter according to claim 21, characterised in that the suspension components (28)  
10 comprise respective sets of resilient arms (28) each of which is associated with a respective coupling member (12).

23. A loudspeaker comprising an inertial vibration exciter as claimed in any preceding claim.



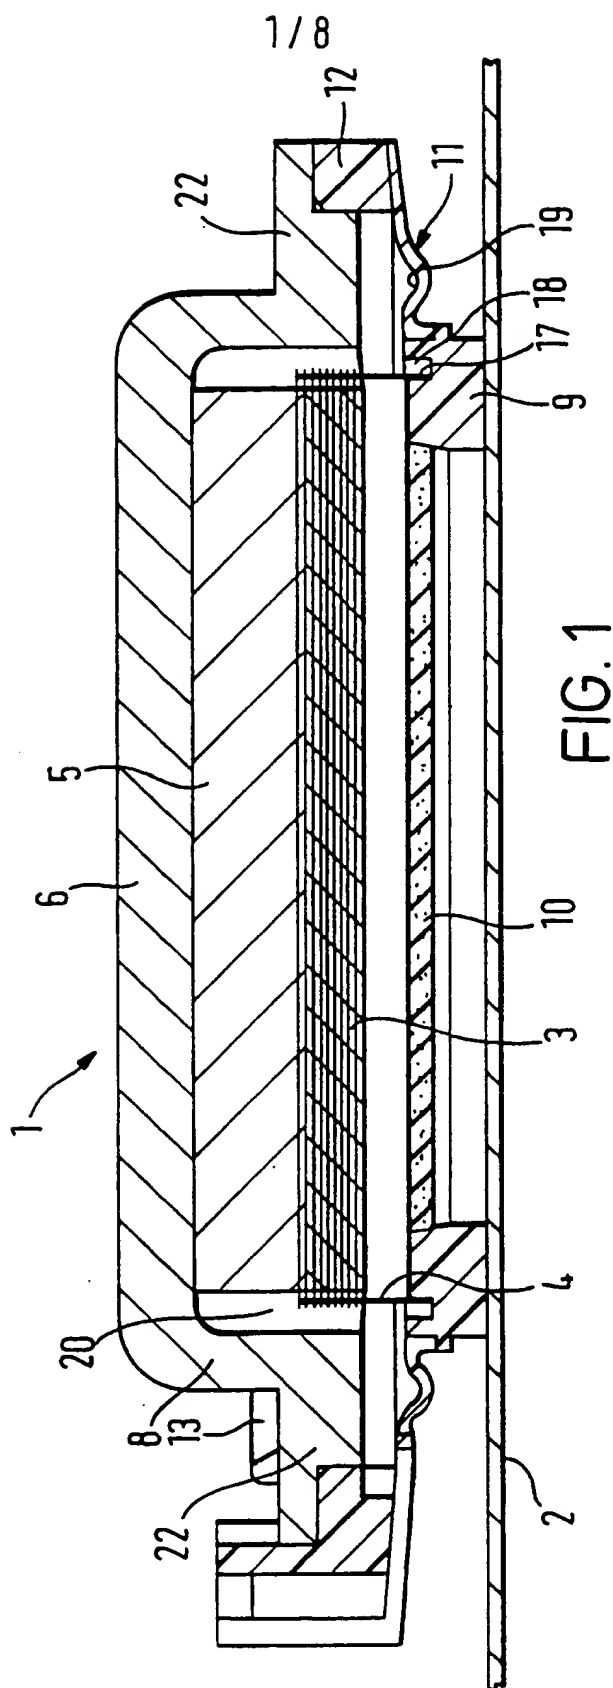

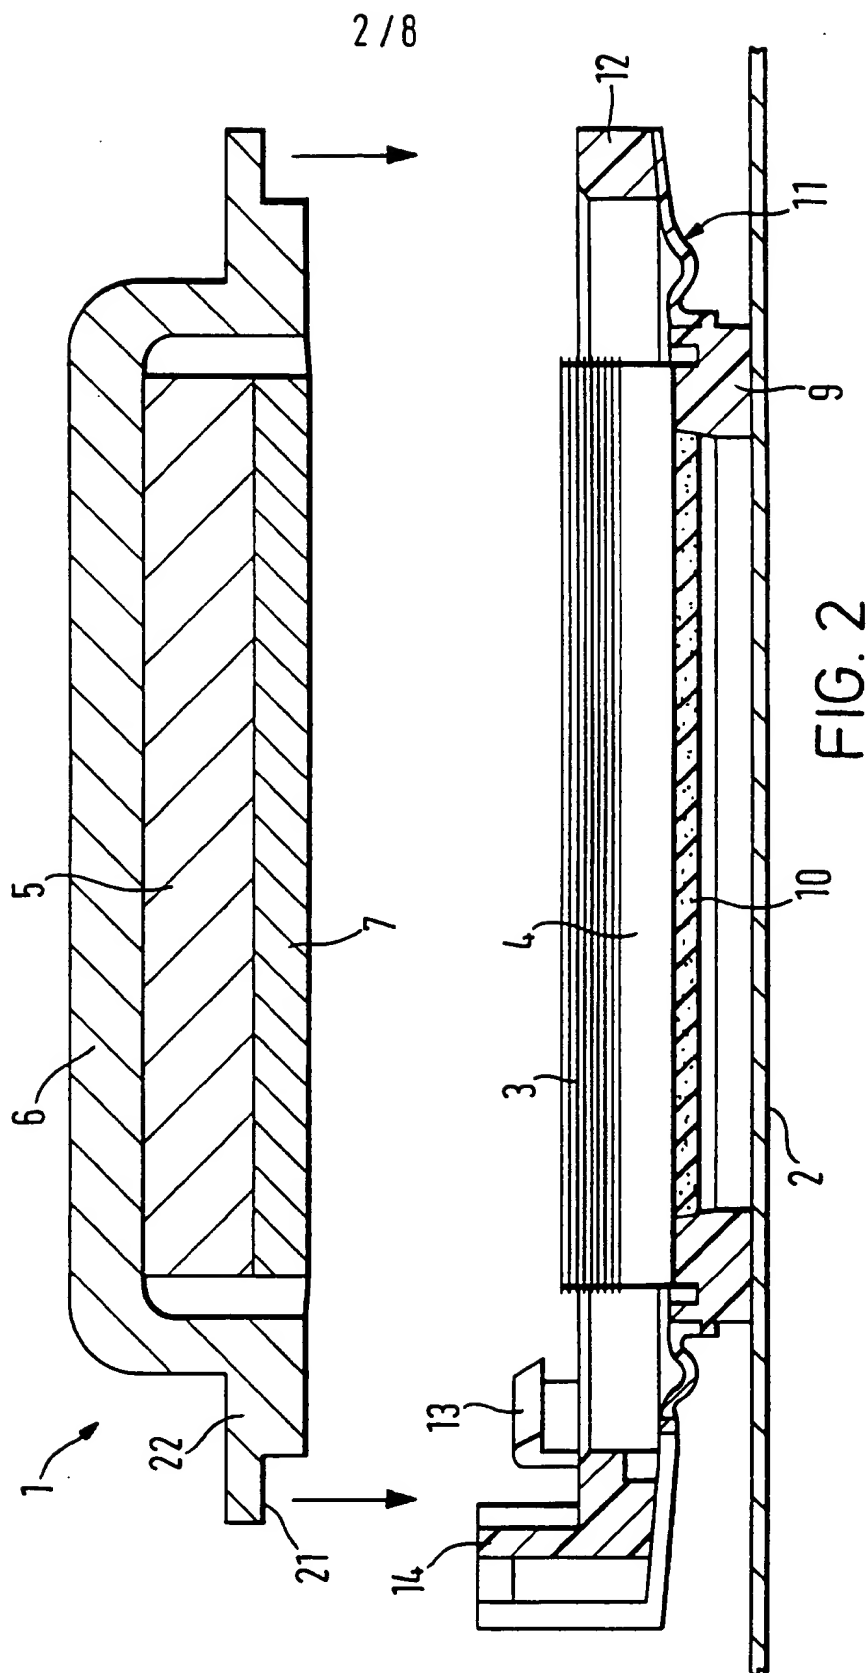

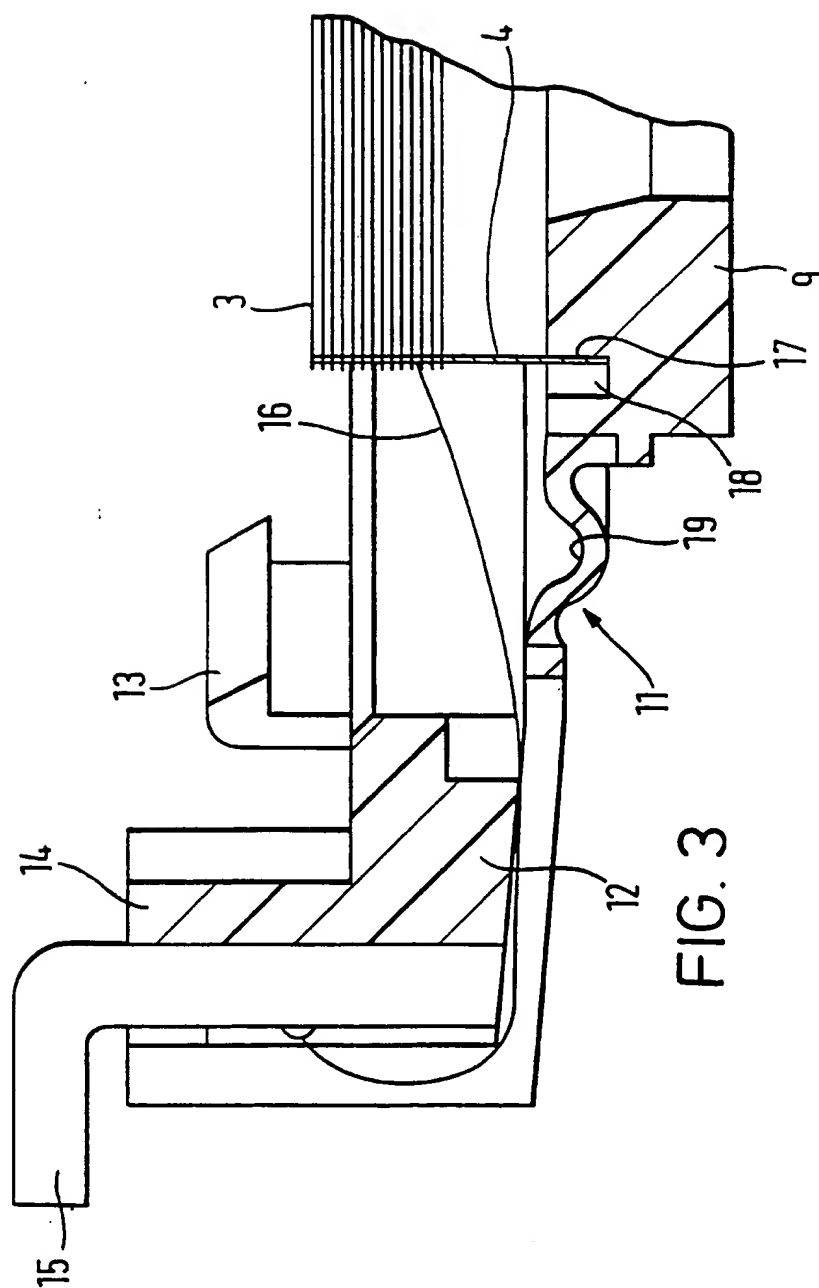

4/8



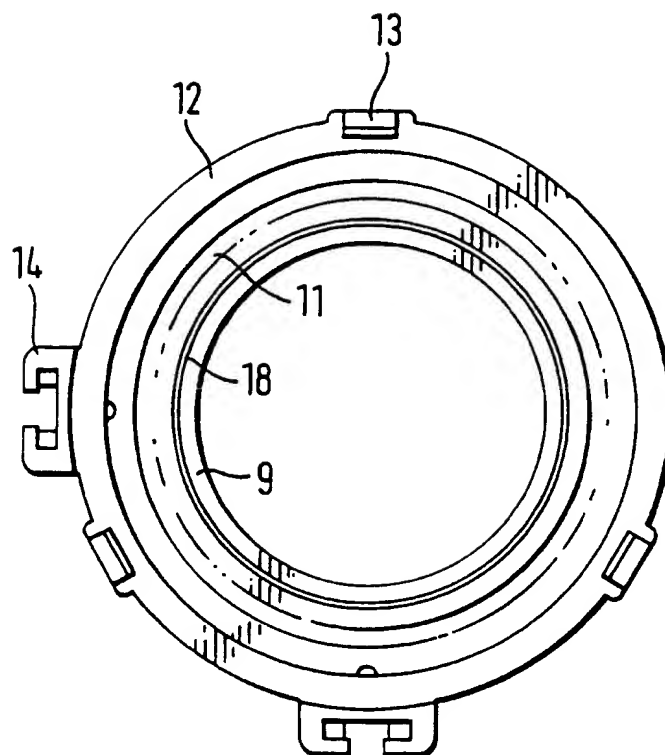


FIG. 4

5/8

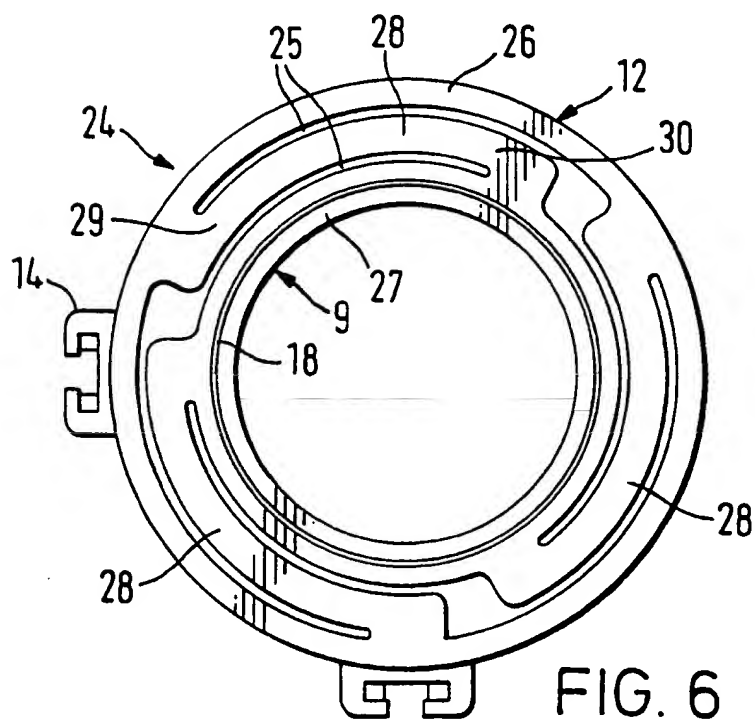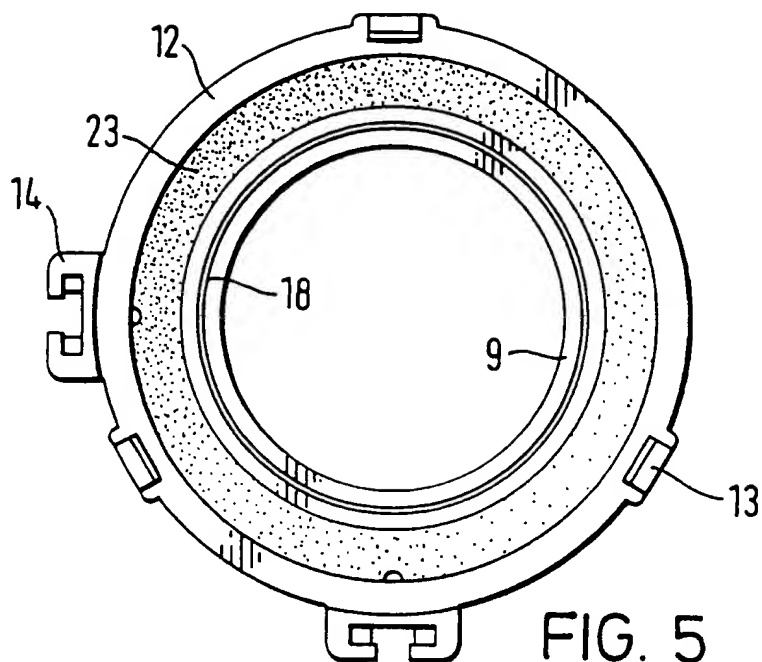

6 / 8

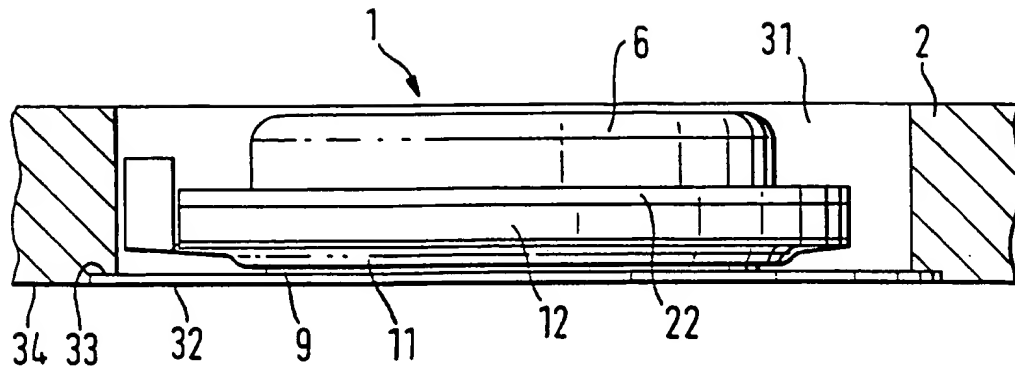


FIG. 7

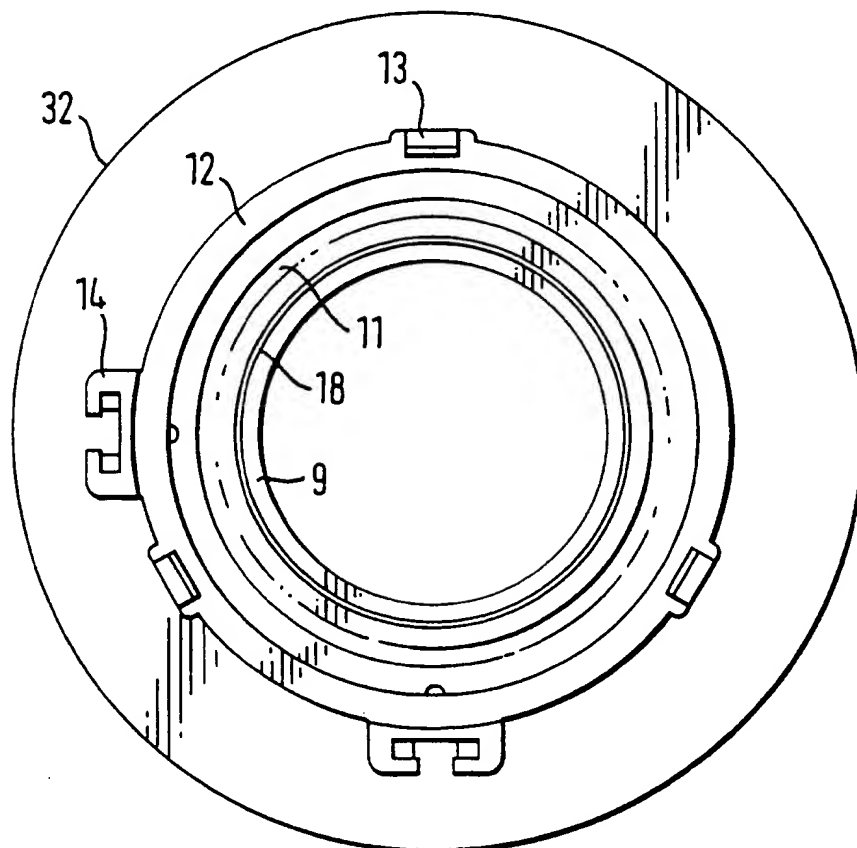


FIG. 8

7/8

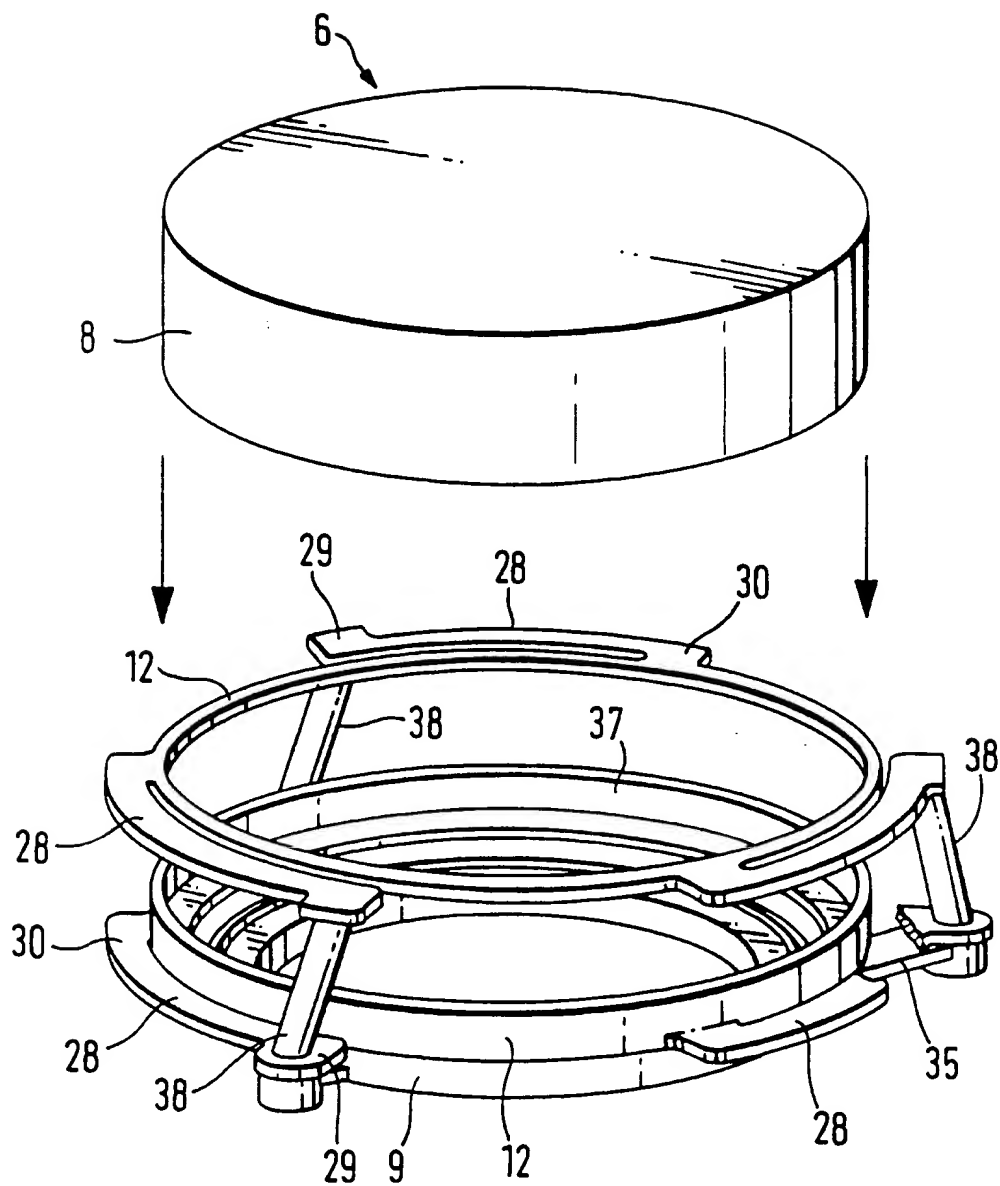


FIG. 9

8/8

